

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000419

International filing date: 07 February 2005 (07.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0402640.7  
Filing date: 06 February 2004 (06.02.2004)

Date of receipt at the International Bureau: 02 March 2005 (02.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

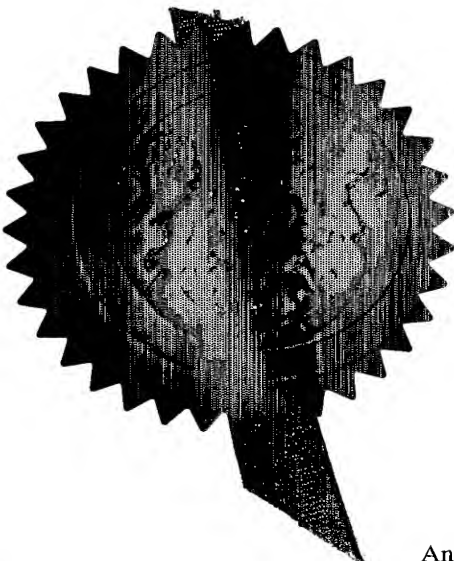

Signed

Dated 22 February 2005

- 6 FEB 2004

Patents Act 1977  
(Rule 16)

LONDON

The  
Patent  
Office

1/77

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference	31.32.83443			- 6 FEB 2004
2. Patent application number (The Patent Office will fill in the)	0402640.7			09FEB04 EB71453-1 000027 P01/7700 0.00-0402640.7 ACCOUNT CHA
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Pelikon Ltd Trecenydd Business Park Caerphilly Wales CF83 2RZ			
Patents ADP number (if you know it)				
If the applicant is a corporate body, give country/state of its incorporation	8337792002			
4. Title of the invention	Ambient Light Sensor			
5. Name of your agent (if you have one)	Frank B. Dehn & Co.			
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	179 Queen Victoria Street London EC4V 4EL			
Patents ADP number (if you know it)	166001 /			
6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months	Country	Priority application number (if you know it)	Date of filing (day / month / year)	
7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)	Number of earlier UK application	Date of filing (day / month / year)		
8. Is a Patents Form 1/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?	NO			
Answer YES if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. Otherwise answer NO (See note d)				

# Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description

7 ✓

Claim(s)

Abstract

Drawing(s)

2 + 2 *Amc*

10. If you are also filing any of the following, state how many against each item.

Priority documents

0

Translations of priority documents

0

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

0

Request for a preliminary examination and search (Patents Form 9/77)

0

Request for a substantive examination (Patents Form 10/77)

0

Any other documents (please specify)

0

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 6 February 2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

Robert Jackson  
020 7206 0600

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s) of the form. Any continuation sheet should be attached to this form.
- If you have answered 'Yes', Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7, you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

Ambient Light Sensor

5 This invention is concerned with improved displays, and relates in particular to displays, such as electroluminescent displays, that employ an ambient light sensor used to allow their brightness and contrast to be adjusted in dependence upon the ambient light conditions.

10 Certain materials are electroluminescent - that is, they emit light, and so glow, when an electric field is generated across them. The first known electroluminescent materials were inorganic particulate substances such as zinc sulphide, while  
15 more recently-found electroluminescent materials include a number of small-molecule organic emitters known as organic LEDs (OLEDs) and some plastics - synthetic organic polymeric substances - known as light-emitting polymers (LEPs). Inorganic  
20 particulates, in a doped and encapsulated form, are still in use, particularly when mixed into a binder and applied to a substrate surface as a relatively thick layer; LEPs can be used both as particulate materials in a binder matrix or, with some advantages,  
25 on their own as a relatively thin continuous film.

This electroluminescent effect has been used in the construction of displays. In some types of these a large area of an electroluminescent material - generally referred to in this context as a phosphor -  
30 is provided to form a backlight which can be seen through a mask that defines whatever characters the display is to show. In other types there are instead individual small areas of EL material. These displays have many applications; examples are a simple digital  
35 time and date display (to be used in a watch or clock), a mobile phone display, the control panel of a household device (such as a dishwasher or washing

machine), and a hand-holdable remote controller (for a television, video or DVD player, a digibox, or a stereo or music centre).

5 The visibility of electroluminescent displays is dependent upon the contrast between those areas of the display that are turned on ("lit") and those that are not; this contrast is the result of the lit areas being both brighter than the surrounding areas ("luminance contrast") and often also a different  
10 colour ("chrominance contrast"). The brightness and colour of the lit areas is a function of the particular electroluminescent material being utilised and of the degree to which it is energised. The brightness and colour of the unlit areas is dependent  
15 on the light reflected off their surface, which in turn is a function of the ambient light level and the materials used to make up the display (which might include filters and anti-reflective coatings).

Many displays - television remote controllers,  
20 for example - are used in a wide range of ambient light levels. As the ambient light level increases, so the amount of light reflected from the off-state areas increases - and hence the luminance contrast decreases for a fixed brightness emitted by the  
25 on-state. While setting the display brightness such that it is visible in the highest expected ambient light level will mean that it can be seen in all expected ambient light levels, this has the disadvantages of increased power consumption and  
30 shorter display lifetime. Also, in some dark usage conditions the display can appear excessively bright and distracting. The invention proposes dealing with this problem by building in to the display a sensor for the ambient light, and then using the sensor's  
35 output to modify the lit areas' brightness appropriately (so that those areas are brighter in

strong ambient light and of reduced brightness in weak ambient light).

5 In one aspect, therefore, this invention provides a light-emitting display wherein there is the necessity for a clear contrast between the display's lit and unlit areas, which display incorporates a sensor for the ambient light, and the sensor's output is utilised to modify the lit areas' brightness appropriately in dependence upon the ambient light conditions.

10 The light-emitting display can be of any sort - it could, for instance, be a light-emitting diode (LED) display, or it could be a backlit liquid crystal display (an LCD) or even a thin film transistor (TFT) display as used in computer screens - but the invention is of particular value when applied to displays using electroluminescent materials to provide the light output.

15 The light sensor may take any convenient form, and be of any suitable type. It may, for example, be a light-dependent resistor (such as the VT935G from PerkinElmer Optoelectronics) or a photodiode (such as the BPW21 from Centronic).

20 The sensor's output may be utilised to modify the lit areas' brightness in any appropriate fashion. For example, most modern displays incorporate a display controller - basically a single chip computer programmable to achieve the desired ends - which determines what the display is showing, and how bright it is, and most conveniently the sensor's output is simply fed to the controller and used thereby as one factor in determining the required display brightness. Typically the controller uses the sensor-supplied measure of the ambient light level  $A$  to adjust automatically the display brightness (as the ambient light level changes) according to a chosen function  $f(A)$  (where  $f(A)$  increases as  $A$  increases;  $f(A)$  can be

a calculable mathematical function, or it can actually be a look-up table holding a range of pre-calculated values appropriate to the expected range of ambient light levels A). In this way the perceived display

5 contrast can be kept approximately constant across a range of ambient light levels, making the appearance of the display more consistent, and so significantly improving the perceived quality of the display. And, of course, by allowing the light output to be kept low  
10 in low ambient light levels the display's power consumption can be greatly reduced, and its lifetime significantly extended.

Though in principle the sensor can be placed almost anywhere within (or even adjacent) the display,  
15 nevertheless for best performance the sensitive area of the light sensor should be both within the bounds of the display and in the same plane as the display surface, so that directional incident light effects are correctly compensated.

20 Generally, displays take the form of panels having lightable areas spaced by unlightable areas. Most conveniently the sensor is mounted directly behind, and hidden by, one such unlightable - unused - area of the display panel (many sensors will give an  
25 acceptable performance even when measuring the ambient light through a number of display layers, such as filters, transparent conductors and dielectric layers).

Where the display utilises a (programmable)  
30 display controller, to which the sensor's output is supplied, the display controller software may also allow the controller to ignore short-term drops in the measured ambient light level, thus preventing the display from going dim if, say, the User accidentally  
35 obscures the sensor whilst using the display.

The controller can include a facility for the User to adjust the display brightness to achieve a



preferred contrast in a given ambient light level, by means of buttons or other User input. The controller can then automatically scale the brightness as before to maintain this apparent contrast as the ambient light changes.

An embodiment of the invention is now described, though by way of illustration only, with reference to the accompanying diagrammatic Drawings in which:

Fig. 1 shows a simple clock-type product utilising an ambient light sensor in accordance with the invention;

Fig. 2 shows the same sort of product as shown in Figure 1, but "exploded" into its main components.

Fig. 3 shows a circuit diagram for a display product as in Figures 1 and 2; and

Fig. 4 shows a software flow diagram for a product as in the previous Figures.

Figure 1 is an example configuration for a simple clock-type product. It is a clock (generally 11) in which the time is indicated by a standard 7-segment digital display (12). A light sensor (13) is mounted behind the display facing forwards, hidden by one or more layers of the display construction (e.g. filters and dielectric layers) but not obscured by the display segments (14). Buttons (15) and (16) allow the User to control the apparent display brightness.

In the "exploded" view of Figure 2 the display 12 is mounted in front of a printed circuit board (PCB; 21). None of the PCB's components are shown here except the sensor 13, which is mounted on the reverse of the board 21 "looking" through an aperture (22) therein. The display 12 and PCB 21 are, in use mounted within a simple box-like container (23).

In Figure 3 is shown a circuit diagram using as the ambient light sensor a light dependent resistor (13).

The relevant parts of the system comprise a display controller (31) connected to a power source (32), a display (12: such as the one shown in Figure 1) and an ambient light sensor (13). In this case the sensor is a light dependent resistor (LDR), which is connected to a fixed resistor (35) and an analogue controller input (36). The other terminal of the fixed resistor 35 is connected to an "enable" output (37) of the display controller 31.

When the display controller 31 wishes to measure the ambient light level, it drives the "enable" output 37 high. Current then flows through the fixed resistor 35 and the sensor LDR 13. The ambient light level affects the resistance of the LDR 13, and hence the voltage measured at the analogue input 36. The controller 31 then sets the brightness of the display 12 according to the required function  $f(A)$  of ambient light level  $A$  (in the case of an electroluminescent display, increasing the voltage and/or frequency of the drive waveforms applied to the display as  $A$  increases). The "enable" output 37, can be driven low (or alternatively high impedance) to minimise current consumption between measurements.

The flow diagram of Figure 4 is a software flow diagram for a product that is used intermittently with automatic display switch-off (for example, a domestic television remote control) having an electroluminescent display. Though the flow diagram speaks for itself, its application can perhaps be better understood from the following description.

When the display is turned on, the initial ambient light level ( $A_0$ ) is measured, and the display brightness set to  $f(A_0)$ . In many products the electroluminescent display is turned off when the product is not in use, to conserve power and extend the display lifetime. The display may be turned off

automatically after a timeout period  $T$ , typically a few seconds.

While the display is on, the current ambient light level ( $A_n$ ) is measured at regular intervals  
5 (typically, every 100ms). The display brightness is set to  $f(A_n)$  if the last measurement ( $A_n$ ) is greater than the previous measurement ( $A_{n-1}$ ). This provides a simple method to prevent the display from flickering due to measurement noise and from dimming if the User  
10 accidentally obstructs the light sensor.

For displays that are on for longer periods, it may be better to compare the current ambient light value ( $A_n$ ) with the initial light level ( $A_0$ ), thus  
15 allowing the display to dim again after brief periods of bright illumination.

---

1/2

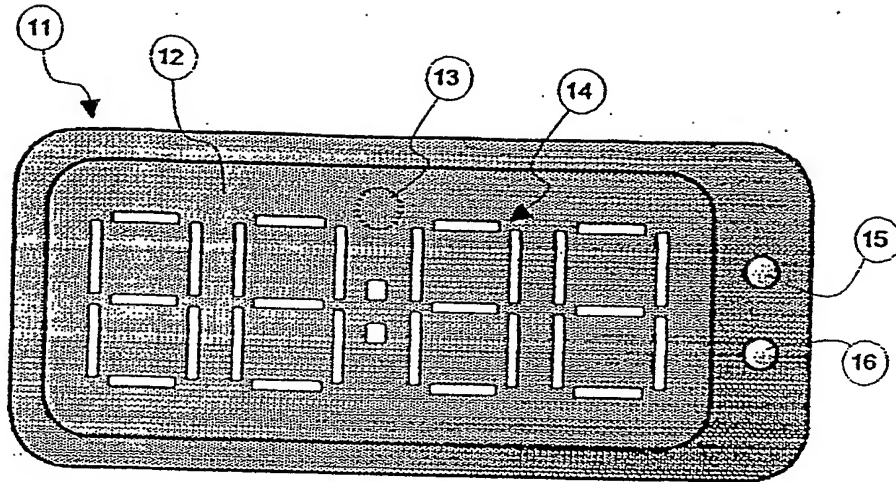


Fig 1

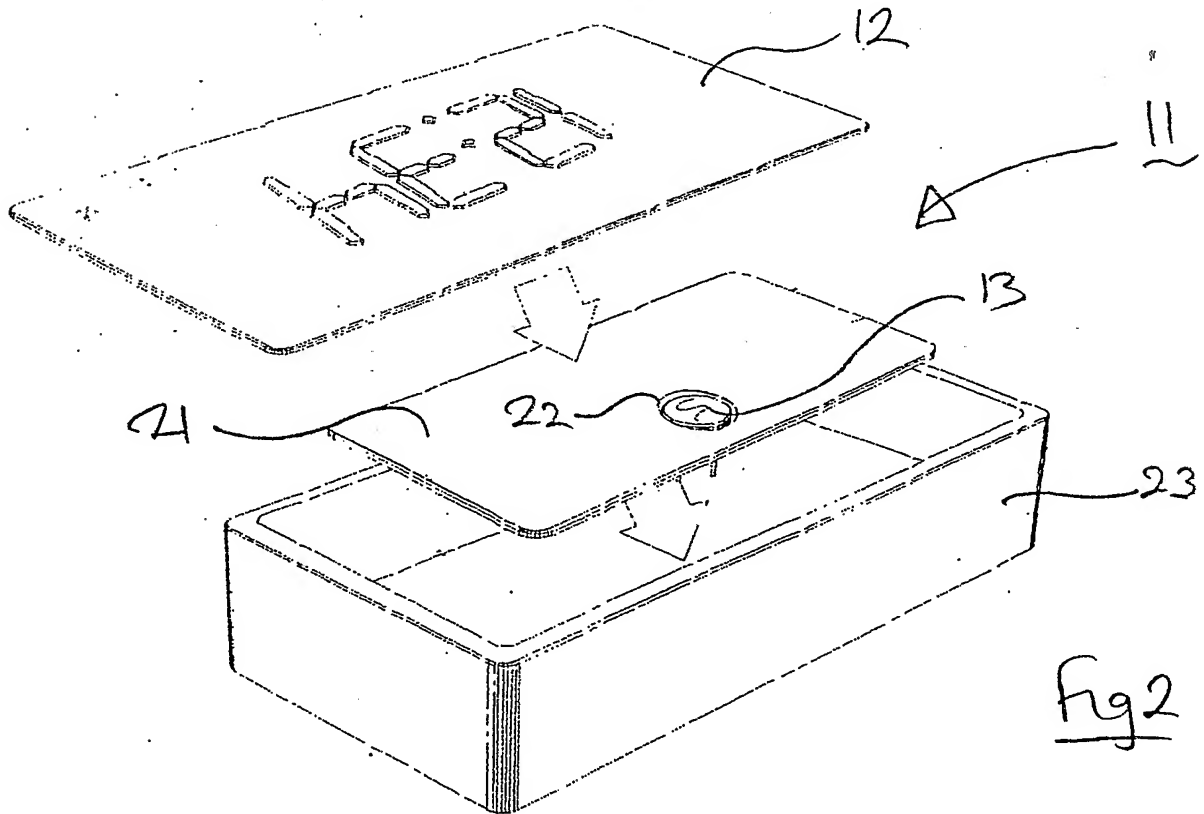


Fig 2

2/2

